


ROV Shank Hook

ROV operated shank hooks for efficient subsea lifting operations.

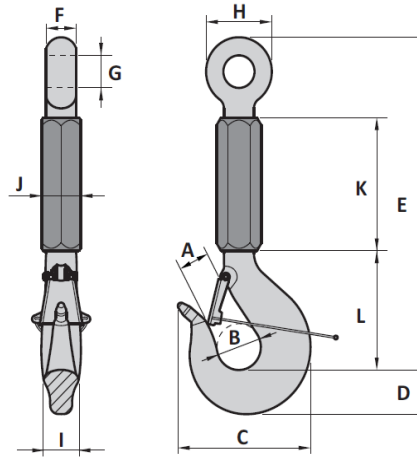

Type for Hook WLL 5 ton up to WLL 80 ton

The ROV Shank Hooks are safe and reliable when performing subsea lifting operations. The hooks are made from quenched and tempered alloy steel and have a long hexagonal body for easy handling by ROV manipulators. The hooks are opened remotely by pulling the release wire. The safety factor is 4:1.

Specifications

WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	J mm	K mm	L mm	Weight kg
5	20	35	50	161	40	515	34	31	68	32	45	250	150	6
12.5	50	40	63	200	58	565	45	40	90	45	60	260	180	11
16	64	45	70	224	67	610	48	44	102	53	60	280	190	16
25	100	50	80	248	75	650	56	52	105	60	70	270	230	21
32	128	60	90	288	85	800	65	60	140	67	80	360	265	34
40	160	70	100	316	95	820	70	70	150	75	85	330	285	42
50	200	75	112	343	106	850	75	72	160	85	100	350	285	54
63	252	85	125	376	118	900	85	85	180	95	110	360	322	74
80	320	100	140	418	132	950	100	85	210	106	120	290	390	104