## Subsea Support Buoy 200

The SSB200 series is our smallest modular buoy. It consists of two module sizes and can be assembled in a wide range of combinations. The combination of two element sizes enables precise correspondence to actual buoyancy needs. The elements have pegs for fitting into each other. Standard pad eyes have a MBL of 22t. Standard color: bright yellow, optional: orange. Buoyancy figures are given seawater with a density of 1,025 kg/dm3. Weight figures are dry weight in air. Buoyancy figures are nominal net buoyancy.

SSB200/1-0

Weight

70 (38)

85 (55

110 (80)

115 (85)

120 (90)

Buoyancy

135 (165)

120 (145)

95 (125)

90 (115)

85 (110)

70 (95)

27 (55) 125 (95) 48 (75) 155 (125)

60 (90) 145 (110)

55 (80) 150 (120)

SSB200/0-

Buoyancy Weight

37 (65) 115 (85)

32 (60) 120 (90)

60 (30)

90 (55)

95 (60)

100 (65)

110 (80)

90 (120)

80 (105)

65 (95)

60 (85)

55 (85)

42 (70)

Depth

Surface

100 m

250 m

500 m

800 m

1000 m

1500 m

2000 m

2500 m

SSB200/0-2

Buoyancy Weight

145

165

200

210

220

205

180

155

145

135

110

100

90

80

SSB200/1-

Buoyancy Weight

100

130

165

180

190

230

240

255

250

220

185

170

165

135


125

110

100

-SSB200/2-0 SSB200/0-3 SSB200/1-2 SSB200/2-1 Buoyancy Weight Buoyancy Weight Buoyancy Weight Buoyancy Weight Buoyancy Weight Depth 295 325 370 410 145 455 150 145 285 325 365 190 405 260 215 190 250 205 280 305 245 335 200 230 255 245 285 310 295 190 215 220 245 260 270 285 300 310 180 205 230 255 160 300 350 165 315 210 375 145 260 285 185 345 235 135 150 300 170 330 190 365 215 395 135 315 350 175 415 120 285 155 380 190

Offshore Rental

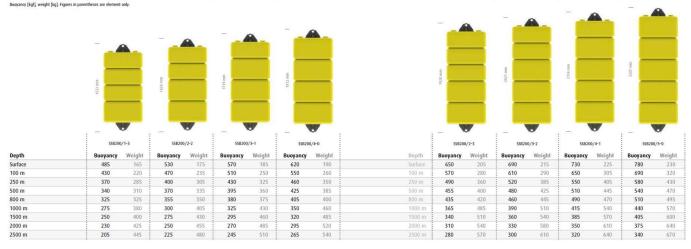

Page 1 of 1