


everything remotely possible™

FXRUM™

SUBSEA TECHNOLOGIES

ISO 13628-8 Class 5 (API 17D) Surface Torque Tool Verification Unit.

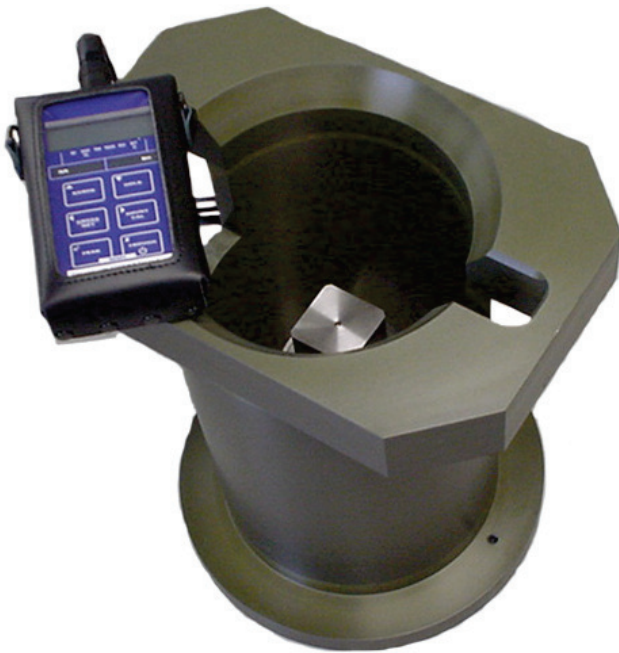

This unit is used to give pre-dive surface confirmation of the torque tool calibration. It consists of a standard ISO class 5 torque reaction bucket with sturdy base and built in torque sensor. The unit comes complete with USB cable to connect to the PSS Torque Tool Control System for Auto Calibration.

FEATURES

- ISO 13628-8 Fig 18 (API 17D) Class 5
- Max Torque 6,750Nm (5,000ft lbs)
- Hand Held Digital Read Out
- USB output to Torque Tool Control System
- Supplied in offshore suitable transit case.

ISO 13628-8 Class 5 (API 17D) Surface Torque Tool Verification Unit.

SPECIFICATIONS

Torque Interface:	ISO 13628-8 fig 18 Class 5
Maximum Torque	6,750Nm (5,000ft lbs)
Handheld Unit	Battery Powered
Materials:	Steel Shaft, Aluminium Housing

WHAT'S IN THE BOX

Torque Tool Bucket inc sensor
Handheld Display
Bucket to Display Cable
Display to USB Cable
Handheld Display Charger
Power Adaptors for display charger
Power Adaptors for display charger
Operations & Maintenance Manual.

PART NUMBERS & OPTIONS

TX00111-100-00 Surface Verification Unit