


ROV Gasket Removal Tool

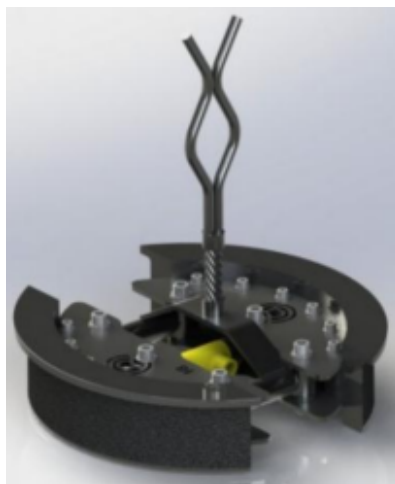

The ROV Gasket Removal Tool is designed to remove and replace the AX and VX type gaskets inside the wellhead.

Key Features

Shoes for 16 ¼ " and 18 ¼ "
Gaskets All Required Hoses
Manual, Test Certificate and transport boxes

Specifications

ROV Handle	Fishtaild/D-Handle
Weight in air/water	15,3 kg / 10,4 kg
Circumference	477 mm
Height	432 mm
Maximum Depth	3000 MSW
Maximum Piston Pressure	200 Bar
Hydraulic connections	4 JIC