


# Hydraulic Intensifier Panel

HP690A40

**nor** Offshore  
Rental

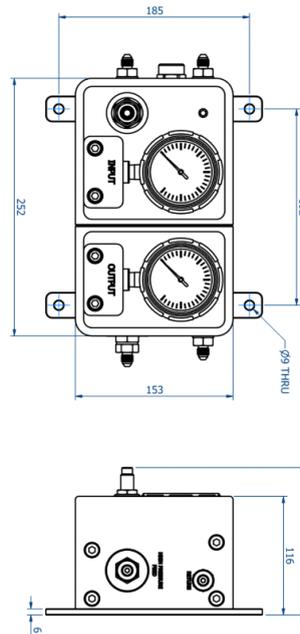

The HP690 features a unique integrated safety circuit that automatically bleeds excess pressure caused by surfacing or temperature variation back to the tank. Comes with removable mounting straps.

## Key Features

Compatible with 2 port hotstabs. No additional drain port is required

Fitted with industry standard MiniBOOSTER™ Intensifier

All fittings rated to 690 bar (10,000 psi)

Suitable for use at any water depth

Compact unit – Fits into limited ROV payload space

Aluminium and stainless steel construction – Corrosion resistant

Robust Design – Pressure gauges are recessed into the body

Dual pressure gauges – Input and output pressures can be accurately monitored

Factory set relief valve on output stage for additional safety

## Main Body

Dimensions	153 x 252 x 144
Weight in air (approx.)	10.7 kg (including mounting straps)
Weight in water (approx.)	7.1 kg (including mounting straps)

## Specifications

Fitted with	4:1 ration intensifier
Max input pressure	172.5 bar (2500 PSI)
Max output pressure	690 bar (10,000 PSI)
Max input flow	14 litre/minute
Max output flow	2 litre/minute