


S Hook Lifting Anchor

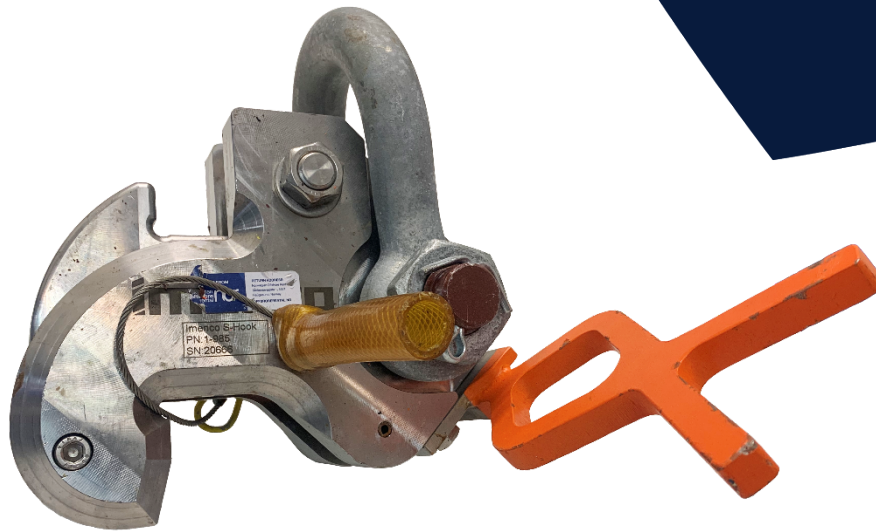

The Imenco S-Hook Lifting Anchor is developed with a purpose to achieve a safe handling when steel structures e.g. riser pipes are being removed during demolition and decommissioning of offshore structures. The Imenco S-Hook Lifting Anchor is designed for loads in parallel to normal direction relative to the riser. The anchor is furthermore equipped with a self-locking latch dog that will automatically activate when the anchor is correctly mounted into a pre-drilled anchoring hole.

Key Features


- Robust design
- Safe lifting due to its self-locking design
- Visual indication to verify if the latching device is correctly locked
- Easy unlocking function – moderate release force
- The S-Hook Lifting Anchor can be released and subsequently re-stabbed without any manual resetting

Versions

Model	Ref. Dwg	Wall Thickness Capacity	OD	Weight, Dry
Std. Type	1-985	28mm	273mm	20 kgs


Main data

Design codes & regulations	Materials	Surface treatment	Load capacity	Proof test load
DnV Lifting Appliances 1994	High strength steel	Zinc treatment	12 Te SWL	15 Te (normal direction)

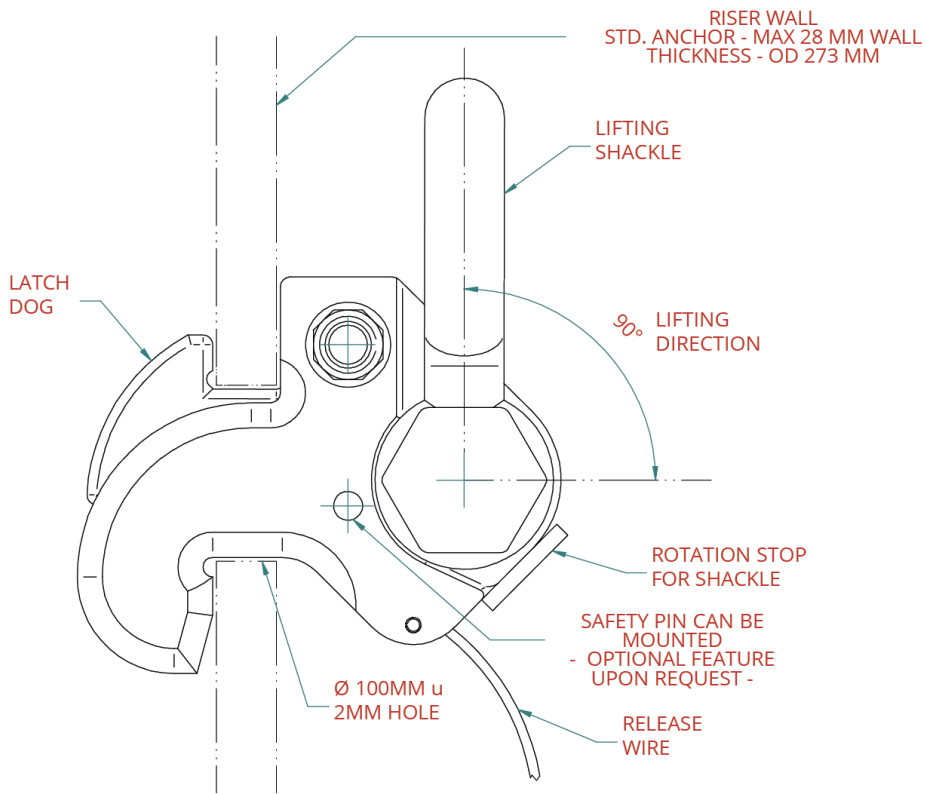


SEQUENCE OF INSTALLATION

1. ENTER NOSE INTO
HOLE



2. ROTATE/LIFT
UPWARDS



3. ANCHOR
LATCHED

