


ISO Docking Beam

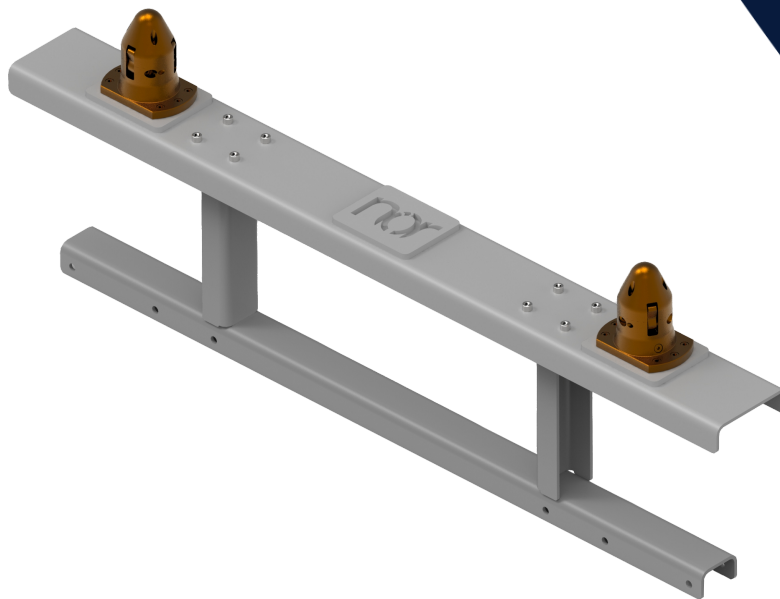

The docking beam is bolted to the front of an XLX vehicle and is used to dock onto subsea structures. The beam is supplied complete with two ISO13628-8:2002 fig 7 docking latches.

Key Features

Aluminium construction
Two off ISO 13628-8 docking latches
Weight in air 25kg / 55.1lbs
210bar / 3045psi working pressure

Specifications

Interface	ISO 13628-8
Dimensions	1500 mm x 528 mm x 160 mm
Weight in air	25 kg
Depth rating	3000 m
Materials	Aluminium, stainless steel, acetal
Hydraulic input pressure	210bar / 3045psi
Hydraulic flow range	2-10lpm