


ROV EYE HOOK

ROV operated eye hooks for efficient subsea lifting operations.

The ROV Eye Hooks are safe and reliable when performing subsea lifting operations. The hooks are made from quenched and tempered alloy steel. The hooks are opened remotely by pulling the release wire. The safety factor is 4:1.

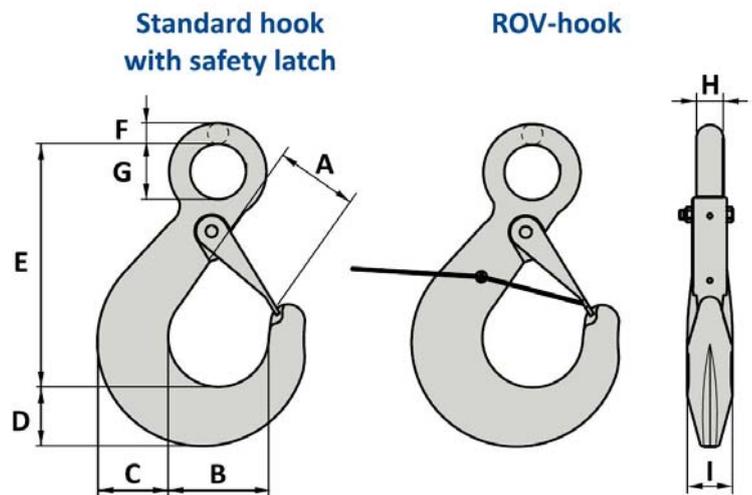

WLL ton	MBL ton	A mm	B mm	C mm	D mm	E mm	F mm	G mm	H mm	I mm	Weight kg
8	32	38	62	53	46	174	20	32	20	35	3
12.5	50	53	79	67	58	219	25	40	25	45	6
16	64	58	88	75	65	246	28	46	28	50	9
20	80	64	99	85	73	277	32	52	32	56	12
28	112	71	112	96	83	313	36	60	36	63	17
31	125	81	125	106	92	349	40	66	40	70	23
40	160	93	140	116	103	386	45	72	45	78	34
50	200	106	158	135	116	442	50	84	50	89	49
63	250	119	176	151	130	494	56	90	56	99	63
80	320	131	198	168	145	610	63	102	63	110	99
100	400	151	225	195	172	650	74	116	74	125	160
150	600	173	250	225	199	765	86	130	86	160	260
200	800	200	275	260	237	850	102	150	102	180	417
250	1000	233	310	290	269	928	120	170	120	200	576
300	1200	264	350	330	310	1052	140	190	140	220	820
400	1600	303	400	380	344	1195	170	210	170	240	1125