


Subsea Support Buoy 850

The SSB850 series is a mid-range buoy, and can be delivered with between one to five elements mounted together. The element has a cross-profile shape allowing elements to fit into each other. Standard Pad eyes have a MBL of 22 t for up to four elements. The buoy with five elements has a steelwork with MBL 40t.

Standard color: bright yellow, optional: orange. Buoyancy figures are given seawater with a density of 1,025 kg/dm³. Weight figures are dry weight in air. Buoyancy figures are nominal net buoyancy.

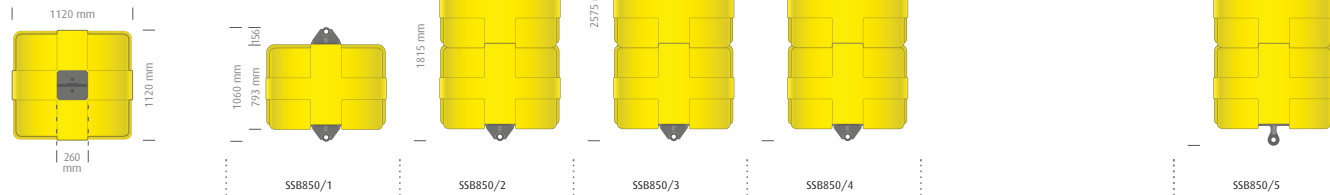

Depth	SSB850/1		SSB850/2		SSB850/3		SSB850/4		SSB850/5	
	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight
Surface	680 (710)	180 (145)	1390	330	2100	480	2800	630	3400	870
250 m	530 (560)	330 (295)	1080	630	1640	930	2200	1230	2700	1630
500 m	490 (520)	370 (335)	1010	710	1530	1050	2000	1390	2500	1820
800 m	470 (500)	390 (360)	960	750	1460	1110	1950	1480	2400	1930
1000 m	400 (425)	460 (430)	820	890	1250	1330	1670	1760	2000	2300
1500 m	360 (385)	500 (470)	740	980	1120	1450	1510	1920	1810	2500
2000 m	325 (355)	530 (500)	680	1040	1030	1540	1380	2000	1660	2600


Buoyancy [kgf], weight [kg]. Figures in parentheses are element only.



Modular Support Buoy 111

The MSB111 series has two element types. The buoy has an elegant design, and suits well demands that is smaller than the largest buoys. The steel work has an MBL of 40t.

Standard color: bright yellow, optional: orange. Buoyancy figures are given seawater with density 1,025 kg/dm³. Weight figures are dry weight in air. Buoyancy figures are nominal net Buoyancy.

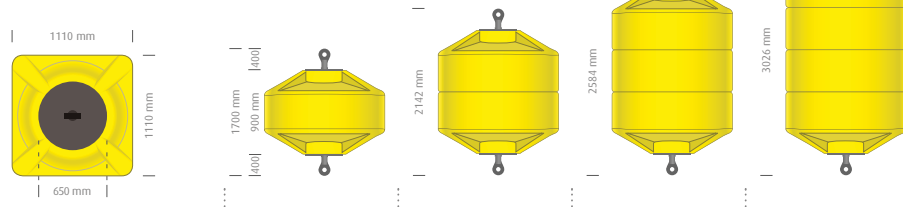


Depth	MSB111/1		MSB111/2		MSB111/3		MSB111/4	
	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight
Surface	580 (435)	280 (95)	1010	385	1430	490	1860	590
250 m	430 (340)	435 (185)	770	630	1100	830	1430	1020
500 m	395 (320)	475 (210)	700	690	1010	910	1320	1130
800 m	370 (305)	495 (225)	670	730	960	960	1260	1190
1000 m	300 (260)	570 (265)	550	840	810	1120	1060	1390
1500 m	260 (235)	610 (290)	485	910	710	1210	940	1510
2000 m	230 (220)	640 (310)	435	960	650	1280	860	1600

Buoyancy [kgf], weight [kg]. Figures in parentheses are element only.

Modular Support Buoy 162

The MSB 162 series offers two different sizes, with two element types. The buoy has an elegant design, and is well suited to situations that demand a smaller buoy. The steel work has a MBL of 40t.

Standard color: bright yellow, optional: orange. Buoyancy figures are given seawater with density 1,025 kg/dm³. Weight figures are dry weight in air. Buoyancy figures are nominal net Buoyancy.

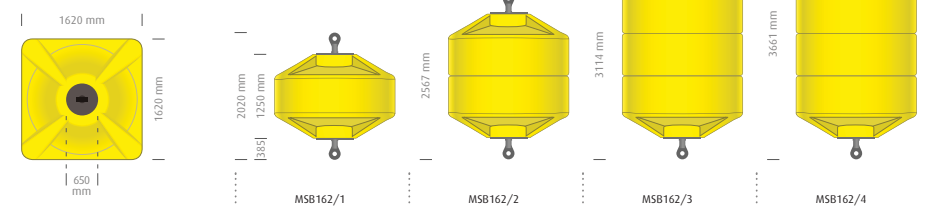

Depth	MSB162/1		MSB162/2		MSB162/3		MSB162/4	
	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight	Buoyancy	Weight
Surface	1790 (1210)	465 (220)	3000	700	4200	930	5400	1170
250 m	1380 (950)	880 (480)	2300	1370	3300	1860	4200	2300
500 m	1280 (880)	980 (540)	2200	1540	3000	2100	3900	2600
800 m	1220 (850)	1040 (580)	2100	1640	2900	2200	3700	2800
1000 m	1190 (830)	1070 (600)	2000	1680	2800	2300	3600	2900
1500 m	1070 (760)	1190 (670)	1820	1870	2600	2600	3300	3200
2000 m	940 (670)	1320 (760)	1600	2100	2300	2900	2900	3600

Buoyancy [kgf], weight [kg]. Figures in parentheses are element only.